


Which LED for which function?

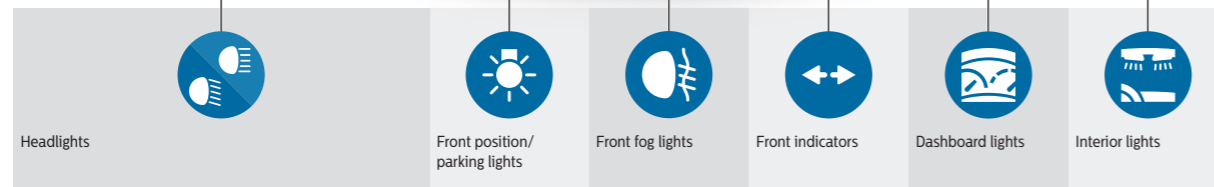

X-tremeUltinon LED – Original automotive performance in LED


LED-HL [≈H1] 5800K	LED-HL [≈H4] 5800K	LED-HL [≈H7] 5800K	LED-T10 [≈W5W] 6000K	LED-FOG [≈H8/H11/H16] 5800K	LED-AMBER [≈PY21W] CAN bus* AMBER	LED-T10 [≈W5W] 4000K	LED-T10 [≈W5W] 6000K	LED-T10 [≈W5W] 4000K	LED-T10 [≈W5W] 6000K
LED-HL [≈HB3/HB4] 5800K	LED-HL [≈H11] 5800K	LED-HL [≈HIR2] 5800K	LED-T20-WHITE [≈W21/5W] WHITE	LED-AMBER [≈WY21W] CAN bus* AMBER	LED-Fest 30/38/43 mm 4000K	LED-Fest 30/38/43 mm 4000K	LED-Fest 30/38/43 mm 6000K	LED-Fest 30/38/43 mm 4000K	LED-Fest 30/38/43 mm 4000K

Ultinon LED – The next level of white light

LED-HL [≈H4] 6200K	LED-HL [≈H7] 6200K	LED-T10 [≈W5W] 6000K	LED-FOG [≈H8/H11/H16] 6200K	LED-AMBER [≈PY21W] CAN bus* AMBER	LED-T10 [≈W5W] 4000K	LED-T10 [≈W5W] 6000K	LED-T10 [≈W5W] 4000K	LED-T10 [≈W5W] 6000K
		LED-AMBER [≈WY21W] CAN bus* AMBER	LED-Fest 30/38/43 mm 6000K	LED-Fest 30/38/43 mm 6000K	LED-Fest 30/38/43 mm 6000K	LED-Fest 30/38/43 mm 6000K	LED-Fest 30/38/43 mm 6000K	LED-Fest 30/38/43 mm 6000K

CANbus adapter for optimal control

CANbus LED-HL [≈H4]	CANbus LED-HL [≈H7]	CANbus 5W	CANbus LED-FOG [≈H8/H11/H16]	Smart CANbus 21W	CANbus 5W	CANbus 5W
---------------------	---------------------	-----------	------------------------------	------------------	-----------	-----------

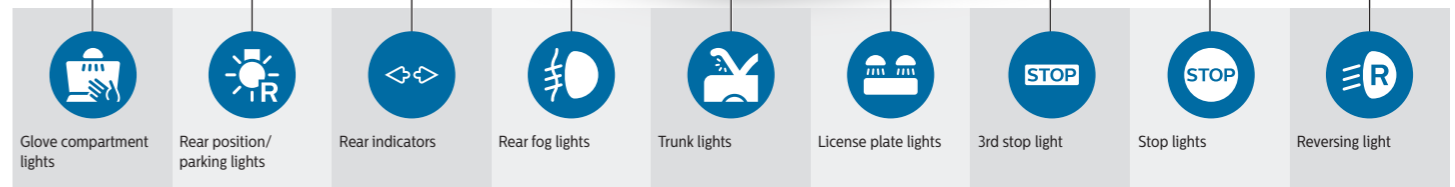

X-tremeUltinon LED – Original automotive performance in LED

LED-T10 [≈W5W] 4000K	LED-T10 [≈W5W] 6000K	LED-T10 [≈W5W] 6000K	LED-AMBER [≈PY21W] CAN bus* AMBER	LED-RED [≈P21W] RED	LED-T10 [≈W5W] 4000K	LED-T10 [≈W5W] 6000K	LED-T10 [≈W5W] 6000K	LED-RED [≈P21W] RED	LED-RED [≈P21W], [≈P21/5W] RED	LED-WHITE [≈P21W] WHITE
LED-Fest 30/38/43 mm 4000K	LED-(T20)-RED [≈P21/5W], [≈W21/5W] RED	LED-AMBER [≈WY21W] CAN bus* AMBER	LED-T20-RED [≈P21W] RED	LED-Fest 30/38/43 mm 4000K	LED-Fest 30/38/43 mm 6000K	LED-Fest 30/38/43 mm 6000K	LED-T20-RED [≈P21W] RED	LED-T20-RED [≈W21W], [≈W21/5W] RED	LED-T20-WHITE [≈W21W] WHITE	LED-T20-WHITE [≈W21W] WHITE

Ultinon LED – The next level of white light

LED-T10 [≈W5W] 4000K	LED-RED [≈P21/5W] RED	LED-AMBER [≈PY21W] CAN bus* AMBER	LED-RED [≈P21W] RED	LED-T10 [≈W5W] 4000K	LED-T10 [≈W5W] 6000K	LED-RED [≈P21W] RED	LED-RED [≈P21W], [≈P21/5W] RED	LED-WHITE [≈P21W] WHITE
LED-Fest 30/38/43 mm 6000K	LED-T20-RED [≈W21/5W] RED	LED-AMBER [≈WY21W] CAN bus* AMBER	LED-T20-RED [≈W21W] RED	LED-Fest 30/38/43 mm 6000K	LED-T20-RED [≈W21W] RED	LED-T20-RED [≈W21W], [≈W21/5W] RED	LED-T20-WHITE [≈W21W] WHITE	LED-T20-WHITE [≈W21W] WHITE

CANbus adapter for optimal control

CANbus 5W	CANbus 5W	Smart CANbus 21W	CANbus 21W	CANbus 5W	CANbus 5W	CANbus 21W	CANbus 21W	CANbus 21W
-----------	-----------	------------------	------------	-----------	-----------	------------	------------	------------

*LED CANbus adapter 21W included in the pack

ECE R37 **A** It is your own responsibility to ensure that the use of the LED retrofit lights complies with applicable local legal requirements.